
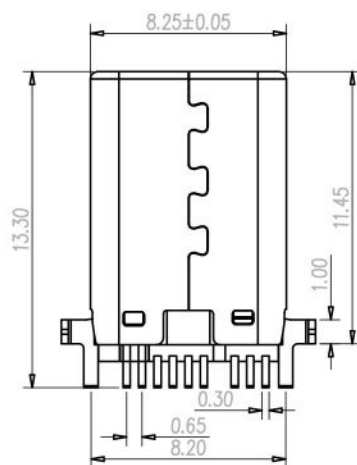
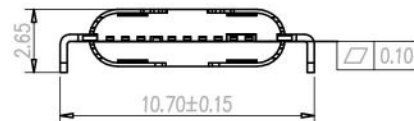
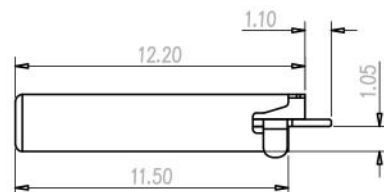


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

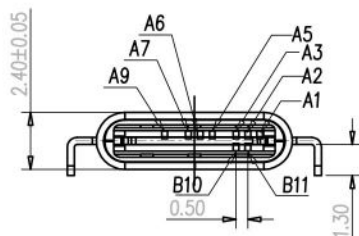

REV.	ECN	DESCRIPTION	MDF'D	DATE
A		初版	HARRY	2019.05.09

Specification:

- 1.Electrical Characteristics:
Contact Current Rating: 3 Amperes Max.
Rated Voltage: 30V Max.
Dielectric Withstanding Voltage: AC 100V r.m.s.
Insulation Resistance: 100 MΩ Minimum.
Contact Resistance: 40 mΩ Maximum.
- 2.Environmental:
Operating Temperature: -30°C~+85°C.
- 3.Mechanical Characteristics:
Insertion Force: 20N MAX.
Withdrawal Force: 5~20N.
Durability Cycles: 10000 Cycles.

5	EMC SPRING	Stainless Steel;T=0.10mm;
4	CONTACT	Copper Alloy;Au1u";
3	LATCH	Stainless Steel; ,T=0.3mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel,T=0.15mm;
NO.	NAME	DESCRIPTION

A12	A11	A10	A9	A8	A7	A6	A5		A3	A2	A1
			VBUS		D-	D+	CC		TX1-	TX1+	GND
									RX1-	RX1+	
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

深圳市威仕达电子有限公司
SHENZHEN VISTAR ELECTRONICS CO.,LTD

X. ±0.25	X.' ±5°	单位	mm	品名	TYPE C 9P 单排SMT 铆合款			制图	CARLOS
.X ±0.20	.X' ±3°	角法		规格				设计	
.XX ±0.15	.XX' ±1°	比例	1:1	页数	1/1	料号	USB-TC09-M02	审核	
.XXX ±0.10	.XXX'	版本	A	图号		模号		核准	G. Q. L

客户图

Autodesk 教育版产品制作

Autodesk 教育版产品制作

Autodesk 教育版产品制作