
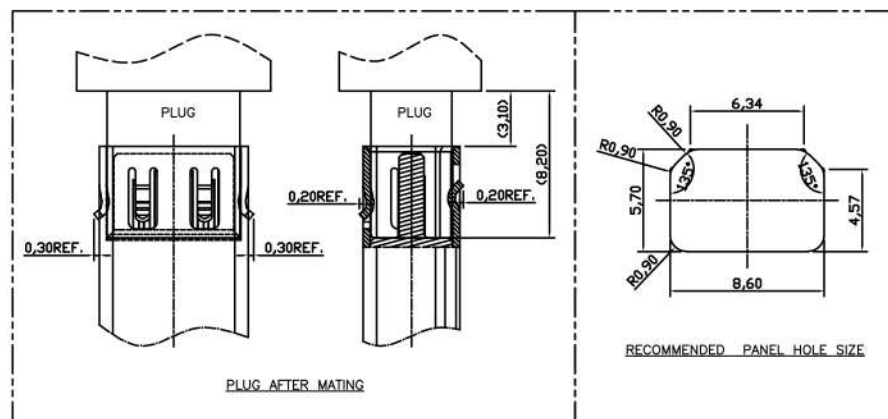









GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2024.3.12	Carlos

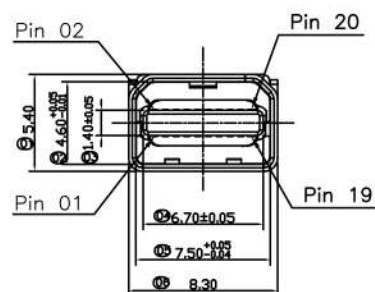

Matters needing attention:

1. Materials:
 - 1.1 Insulator: LCP (E130i), UL94V-0, Color: Black.
 - 1.2 Cap: LCP , UL94V-0, Color: Black.
 - 1.3 Contact: Brass (2680).
 - 1.4 Shell: SUS304.
2. Finish:
 - 2.1 Contact: Male female plug-in contact area gold plated 30u", overall nickel plated, minimum 30u", Gold plating G/F on the welding joint area
 - 2.2 Shell: 50u"MIN. overall nickel plated.
3. Specification:
 - 3.1 Rated current: 0.5A.
 - 3.2 Contact resistance: maximum 50m Ω .
 - 3.3 Insulation resistance: minimum value of 100M Ω .
 - 3.4 Dielectric withstand voltage: AC 500V/minute.
 - 3.5 Working temperature: -25 ° C to +85 ° C.
 - 3.6 Durability: 10000 cycles.
4. Others:
 - 4.1 This component and its homogeneous joint components comply with RoHS standards.
 - 4.2 Resistance to 260 ° C welding heat for 10 seconds.

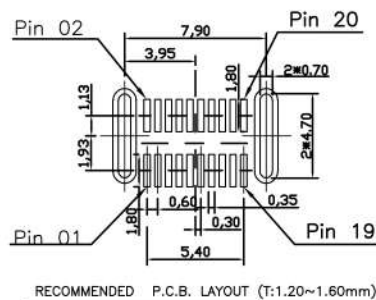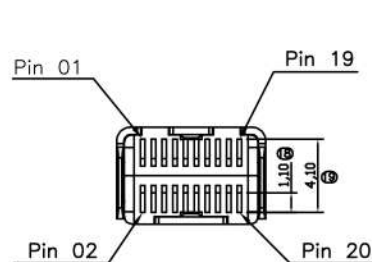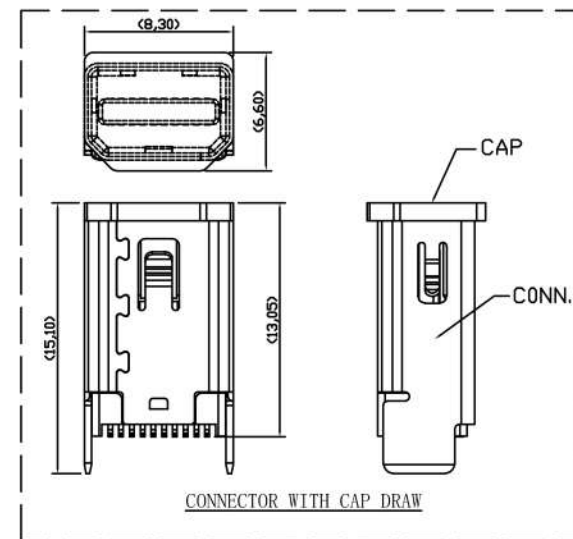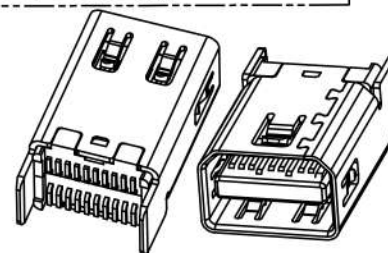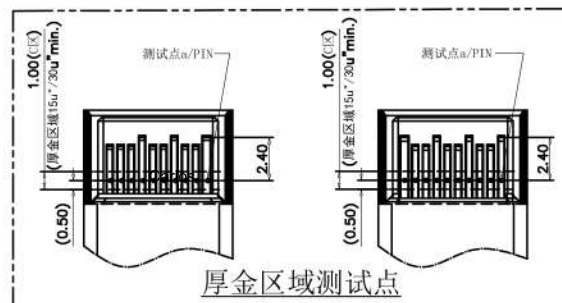
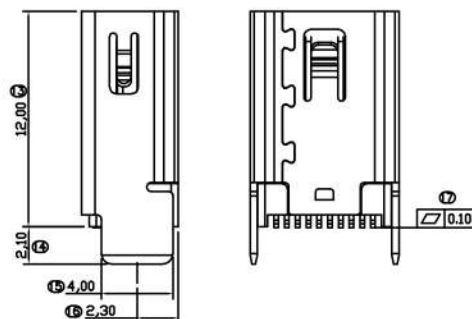
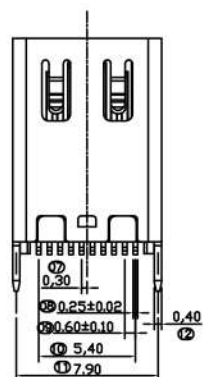


Shenzhen Vistar Electronics Co.,Ltd

TOLERANCE:		DESIGN BY :	DATE :	PART NAME:	
X. X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 X. "±3" X. X"±1"		Carlos	2024.3.12	MINI DP-SMT直立式 (无卷边) 带胶盖	
 UNIT: mm		CHECKED BY:	DATE :	PART NO.	DP-MN-F02
		APPROVED BY:	DATE :	MOLD NO.	NA
				DRAW NO.	
SCALE:1:1	SIZE:A4			SHEET NO.	01 OF 02


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2024.3.12	Carlos

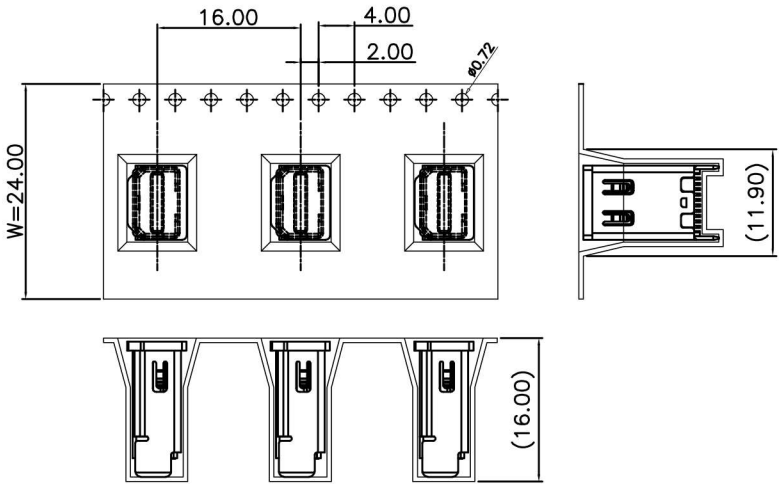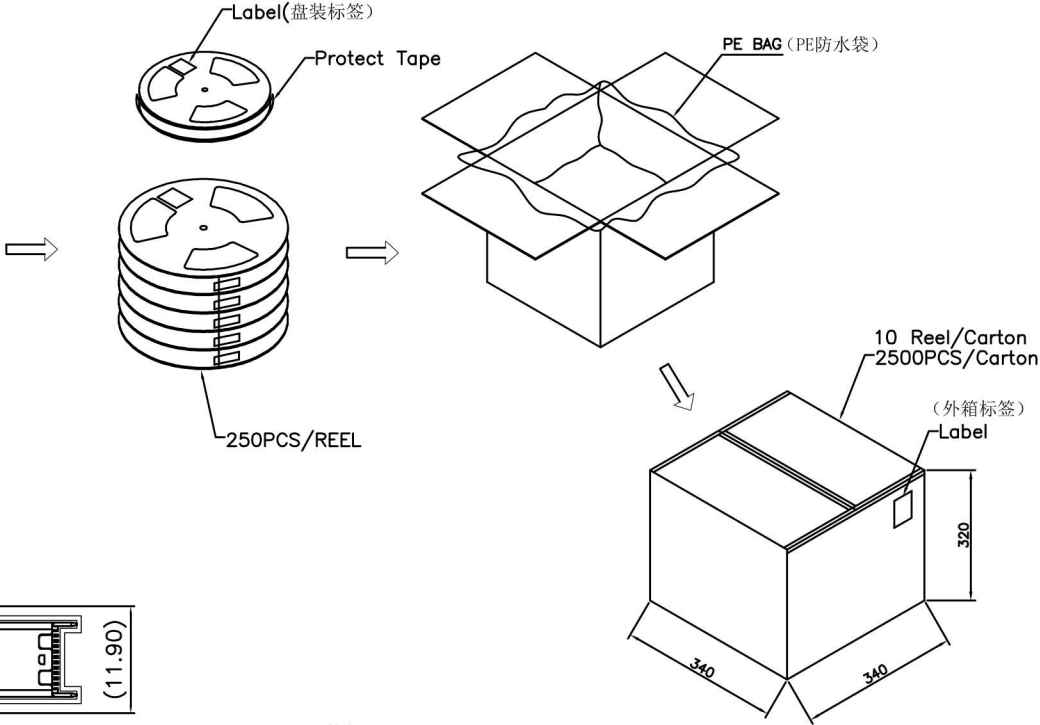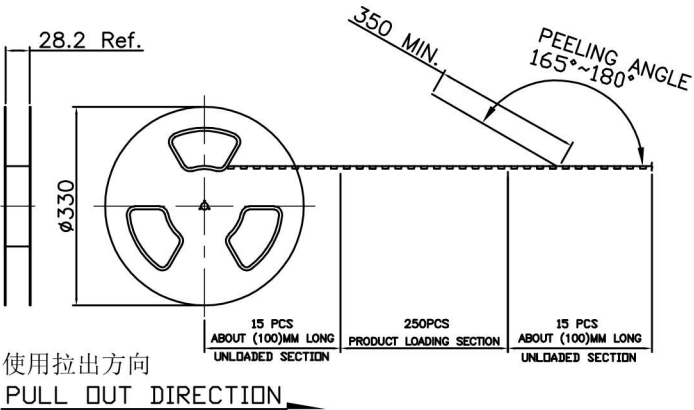

- 备注:
1. 把上下载带送入载带机进行调整,然后将产品按照指定的方式摆入下载带中,开动卷带机进行卷装(每卷包250PCS),卷装完成后需用上带缠绕最少20CM;(上带为自沾式)
 2. 在卷装OK的每卷盘面的指定位置上贴上物料和RoHS标签,装入纸箱内;每箱装10盘.外箱上依客户要求贴上相应的标签.
 3. 纸箱用封箱带将其封好,胶带要求工字型,不可遮住出货标签;
 4. 如果客户对包装标签另有要求,请按客户要求作业;有未满足之零数箱需用缓冲材料填充;
 5. 上载带剥离力:0.2-1.2N.;

PACKAGING BY T&R	/ G/W KG	/ N/W KG	250 PCS/ REEL	10 REELS/ BOX	2500 QUANTITY (PCS)	DP-MN-FO2 PART NUMBER
------------------	----------	----------	---------------	---------------	---------------------	-----------------------

Shenzhen Vistar Electronics Co.,Ltd				
TOLERANCE: X. X. X ±0. 30 X. XX ±0. 20 X. XXX ±0. 10 X. ±3° X. X°±1 °  UNIT: mm SCALE:1:1 SIZE:A4	DESIGN BY :	DATE :	PART NAME:	
	Carlos	2024. 3. 12	MINI DP-SMT直立式 (无卷边) 带胶盖	
	CHECKED BY:	DATE :	PART NO.	DP-MN-FO2
			MOLD NO.	NA
			DRAW NO.	
APPROVED BY:	DATE :	SHEET NO.	02 OF 02	