

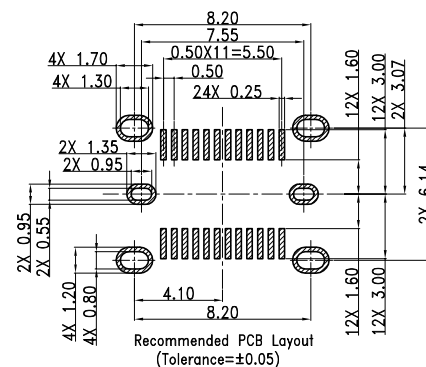
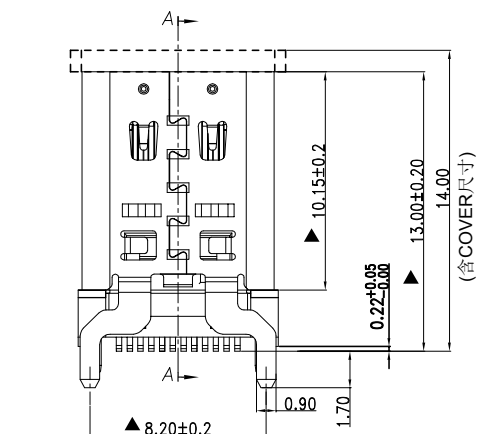


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原 始 版 本(INITIAL EDITION)	2024.5.29	Jacky

- 1.Contact Resistance:40mΩ Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST; 电镀测点
- 5.Durability:10000 Cycles;

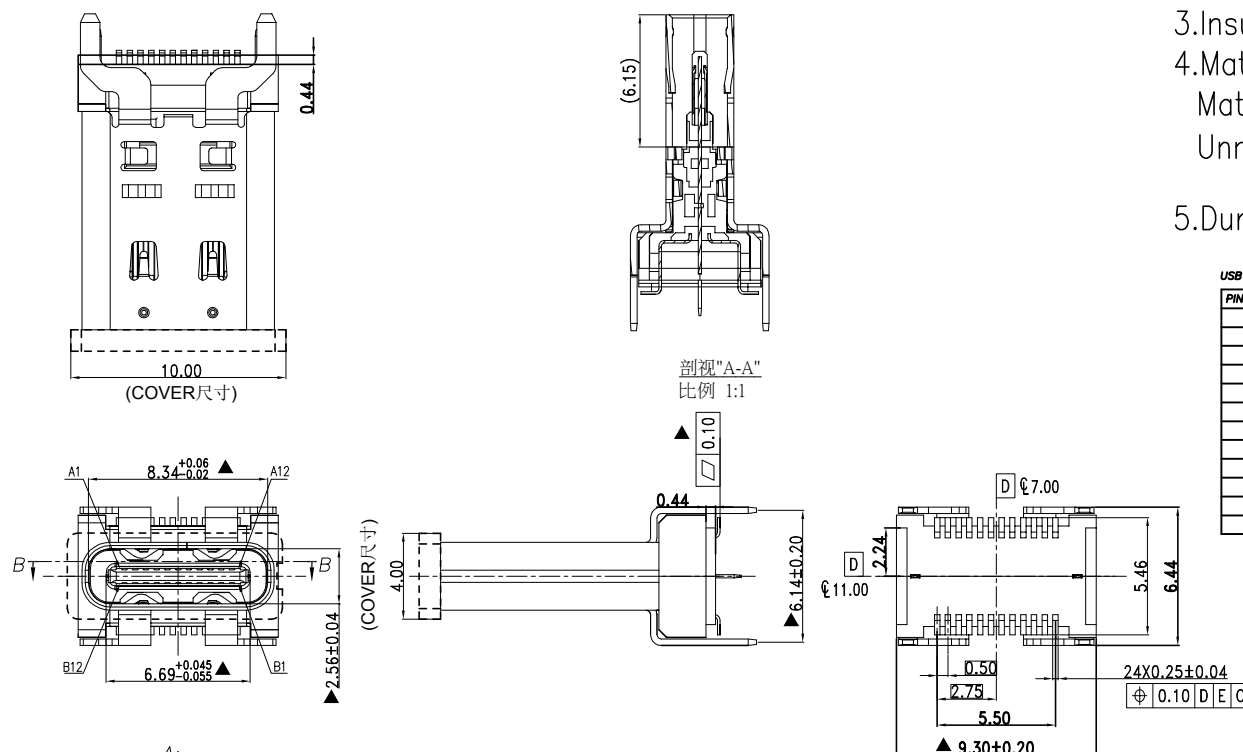


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSTXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

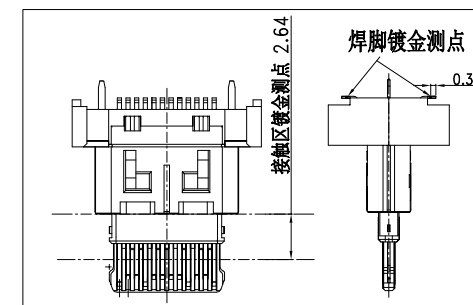

Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304(T=0.30)	Ni:30u" Min.	1PCS
2	Mid Plate	SUS301(T=0.15)	Ni:30u" Min.	1PCS
3	Contact	C18400(T=0.12)	Mating Area: See P/N Solder Tails: Au G/F	24PCS
4	InsertMolding	LCP	UL 94V-0 Black	1PCS
5	COVER	LCP	UL 94V-0 Black	1PCS

Shenzhen Vistar Electronics

TOLERANCE:		DESIGN BY : Jacky	DATE : 2024.5.29	PART NAME:	
X.	±0.30			USB 4 TYPE C 母座24PIN直立式H13,L=9.3	
X.X	±0.25				
X.XX	±0.20				
X.XXX	±0.10				
X° ±1°	X.X° ±0.5°	CHECKED BY:	DATE :	PART NO.	USB-TC24-F18
 UNIT: mm [inch]		APPROVED BY:	DATE :	MOLD NO.	
				DRAW NO.	
				SHEET NO.	01 OF 02
				SCALE:1:1	